







KELLY SO_SO5_SO1

Large 80_Medium 60_Small 50 Dome | Pendant

220-240V

- SO:  4x max 46W eco Classic A60 (E27)
 4x max 23W CFL compact (E27)
 4x max Classic A60 LED (E27)

- SO1:  3x max 46W eco Classic A60 (E27)
SO5:  3x max 23W CFL compact (E27)
 3x max Classic A60 LED (E27)

Disinserire la tensione prima di operare sull'apparecchio.


ISTRUZIONI DI MONTAGGIO

- 1) Rimuovere il coperchio [C] dalla scatola a soffitto [A] svitando il grano [E] (Fig.1 e Fig.4)
- 2) Fissare al soffitto la placca a muro attraverso i fori asolati [G]
- 3) Regolare l'altezza della lampada agendo sulle tre funi d'acciaio [L] regolando i registri [F] (vedi Fig.3)
- 4) Eseguire il collegamento elettrico ai morsetti [B]
- 5) Regolare la lunghezza del cavo elettrico attraverso il bloccacavo [P] all'interno della scatola [A] (vedi Fig.2)
- 6) Riposizionare il coperchio [C] alla placca a soffitto [A] bloccandolo con il grano [E] (Fig.4)
- 7) Inserire le lampadine nei portalampade.
- 8) Svitare il dischetto [H] per inserire il vetro [D]
- 9) Posizionare il vetro [D] e avvitare il dischetto [H] senza stringere troppo.

Before installing turn off the power to the electrical box

MOUNTING INSTRUCTIONS

- 1) Undo the grub screw [E] and remove the cover [C] from the ceiling plate [A] (Fig.1 and Fig.4)
- 2) Fix the plate [A] to the ceiling through the slots [G] using appropriate fasteners.
- 3) Adjust the length of the suspension wires [L] using the terminal blocks [F] (see Fig.3)
To adjust the length of the wire undo the pin a little bit and push upwards.
Screw the pin to block the steel wire in the thread-blocking bolt.
- 4) Make the connection of the power supply to the terminal blocks [B]
- 5) Adjust the length of the power cable using the cable grip [P] inside the ceiling plate (see Fig.2)
- 6) Slide the cover [C] over the ceiling plate [A] and secure it in position using the grub screw [E] (Fig.4)
- 7) Install the light bulbs on the lampholders.
- 8) Unscrew the flat-head bolt [H] to place the glass shade [D]
- 9) Place the glass [D] and secure it in position with the bolt [H], pay attention not to over-tighten.

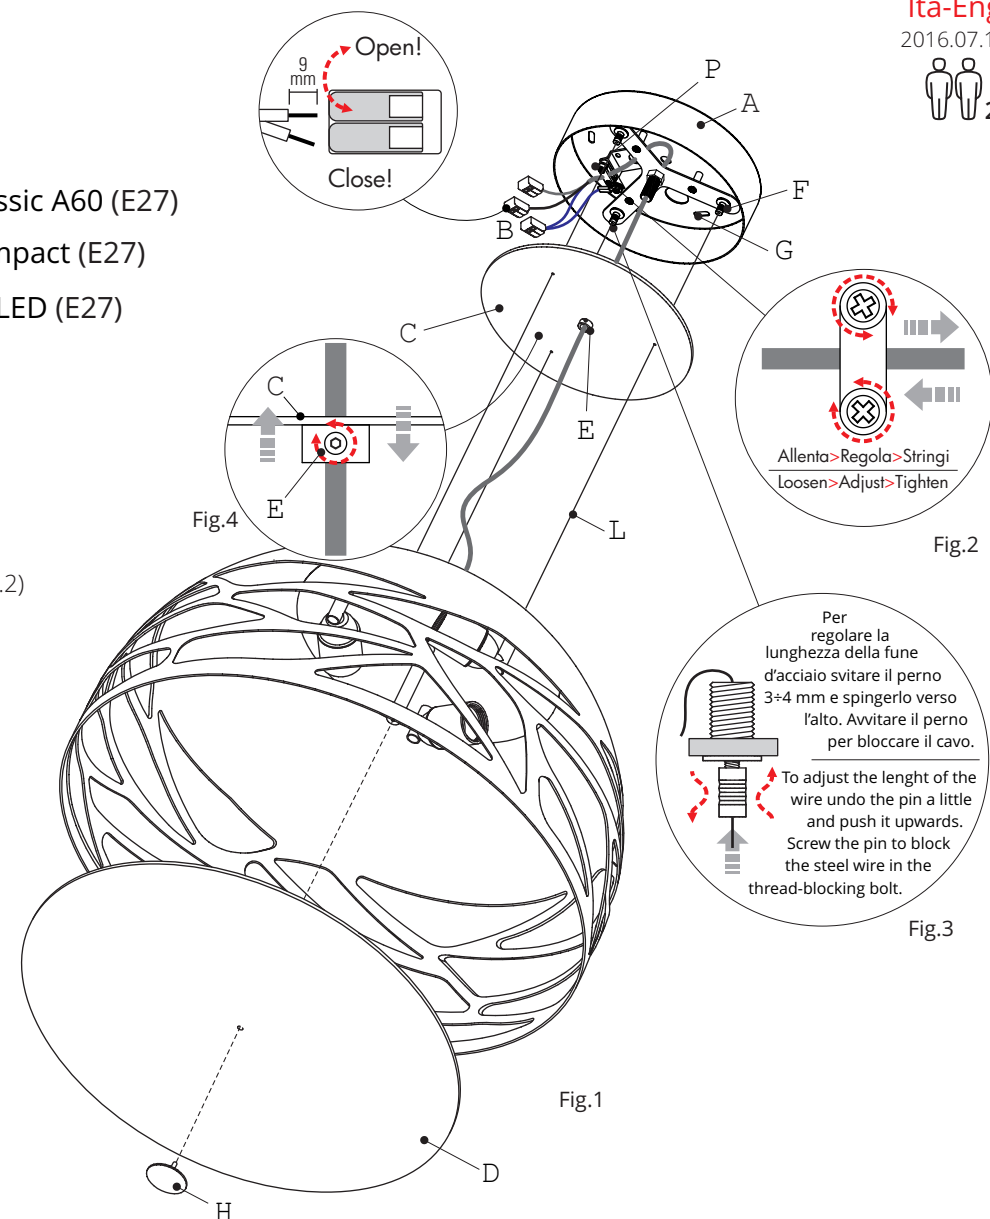

Ita-Eng

2016.07.18



Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso o negligenza. Ogni modifica può compromettere la sicurezza rendendo l'apparecchio pericoloso. Studio Italia Design declina ogni responsabilità per i prodotti modificati. L'apparecchio non deve essere installato in posizioni o in applicazioni diverse da quelle indicate nelle istruzioni di montaggio.

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse. Any modification may compromise safety causing the product to become dangerous. Studio Italia Design declines all responsibility for products that are modified. Fixture must not be installed in any position or used in a different way than shown in his instructions.

Conservare le istruzioni per una manutenzione futura. L'apparecchio deve essere installato da personale qualificato
 Keep these instructions for future reference. To be installed by a qualified licensed electrician only

