

**BEGA****22 444**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

## Product data sheet

### Application

Ceiling, wall and pillar luminaire with high constructive strength.  
The thick-walled crystal glass distributes the light uniformly.

### Product description

Luminaire made of aluminium alloy,  
aluminium and stainless steel  
BEGA Unidure® coating technology  
Crystal glass, white inside  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 144 mm  
2 cable entries for through-wiring of mains  
supply cable  $\varnothing$  7-10.5 mm  
Connecting terminal and  
earth conductor terminal 2.5<sup>□</sup>  
Lampholder E 27  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK08  
Protection against mechanical  
impacts < 5 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.8 kg

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 60 W

For this luminaire we recommend the following  
BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimmmable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimmmable


Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
dimmmable

**13556** LED 9 W · 805 lm · 2700-6500 K  
dimmmable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

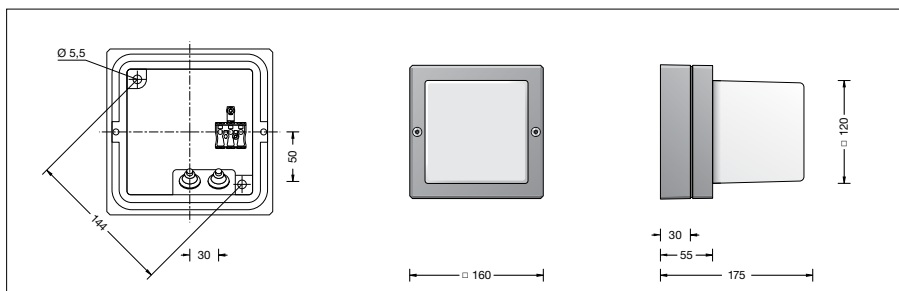

### Light technique

Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Article No. 22444

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

### Light distribution

